











# HERRSCORK

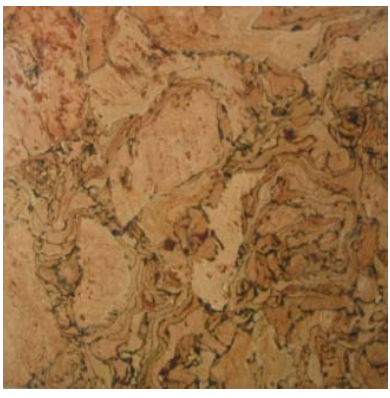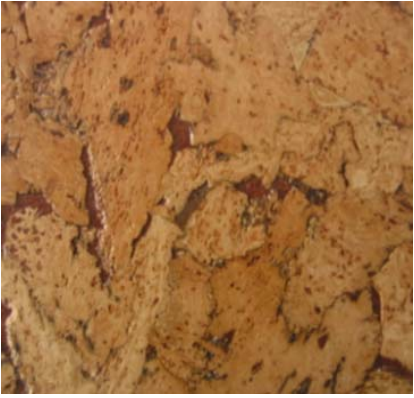
CATALOG.



HERRSCORK

COPYRIGHT 2001-2007


	<p><b>Item No.:</b>  <b>CWTR-A003</b>  <b>Design: River</b>  <b>OEM Service</b></p>		<p><b>Item No.:</b>  <b>CWTC-A005</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>
	<p><b>Item No.:</b>  <b>CWTC-B001</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>		<p><b>Item No.:</b>  <b>CWTC-B004</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>
	<p><b>Item No.:</b>  <b>CWTC-B005</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>		<p><b>Item No.:</b>  <b>CWTC-C001</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>
	<p><b>Item No.:</b>  <b>CWTC-C002</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>		<p><b>Item No.:</b>  <b>CWTC-C003</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>
	<p><b>Item No.:</b>  <b>CWTC-C005</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>		<p><b>Item No.:</b>  <b>CWTC-D008</b>  <b>DESIGN:CARVE</b>  <b>OEM Service</b></p>

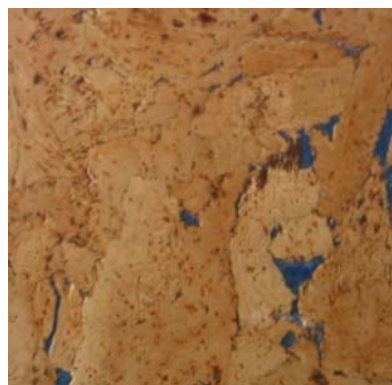

**Item No.:**  
**CWTC-E002**  
**DESIGN:CARVE**  
**OEM Service**



**Item No.:**  
**CWTC-E003**  
**DESIGN:CARVE**  
**OEM Service**

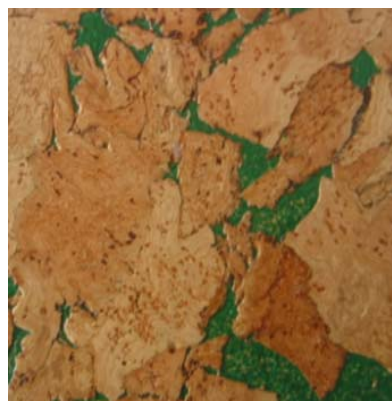

**Item No.:**  
**CWTC-E004**  
**DESIGN:CARVE**  
**OEM Service**



**Item No.:**  
**CWTC-E005**  
**DESIGN:CARVE**  
**OEM Service**

**Product Origin:** China  
**Brand Name:** Herrs Cork  
**Other Price Terms:** FOB CHINA PORT;CIF  
**Payment Terms:** L/C, T/T  
**Supply Ability:** 15,000M2/MONTH  
**Minimum Order:** 2,000M2








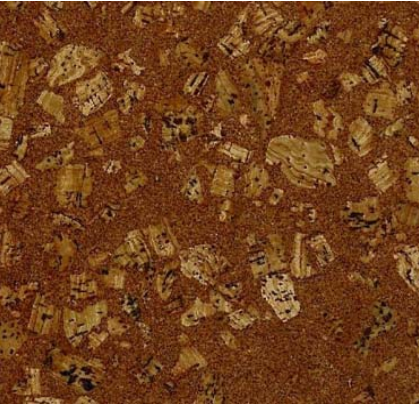


## Cork wall tiles:

### Feature:

- 1) Thickness:3mm~5mm
- 2) Length (max): 900mm width (max): 600mm
- 3) Uses: the good material for flooring, or other interior decoration.
- 4)Feature: Soundproof cork insulation, thermal insulation material
- 5) Protect the environment, abrasive resistance is good

**WWW.HERRSIAN.COM**

**Beautiful, Natural, Earth Friendly, Decorating Materials!**

	<p><b>Design:</b> Golden <b>Type:</b> Click/Gluedown</p>		<p><b>Design:</b> Maple <b>Type:</b> Click/Gluedown</p>
	<p><b>Design:</b> Tensing <b>Type:</b> Click/Gluedown</p>		<p><b>Design:</b> Carlo <b>Type:</b> Click/Gluedown</p>
	<p><b>Design:</b> Salon <b>Type:</b> Click/Gluedown</p>		<p><b>Design:</b> Monte <b>Type:</b> Click/Gluedown</p>
	<p><b>Design:</b> Porto <b>Type:</b> Click/Gluedown</p>		<p><b>Design:</b> Roma <b>Type:</b> Click/Gluedown</p>
	<p><b>Design:</b> Monte <b>Type:</b> Click/Gluedown</p>		<p><b>Design:</b> Walnut <b>Type:</b> Click/Gluedown</p>

Product Origin:	China
Brand Name:	Herrs Cork
Other Price Terms:	FOB CHINA PORT;CIF
Payment Terms:	L/C, T/T
Supply Ability:	15,000M2/MONTH
Minimum Order:	2,000M2

## Cork floor coverings:

### 1.CLICK FLOATING TILES

Size:900X190X12MM; 900X270X12MM

### 2.GLUEDOWN FLOOR TILES

Size:305X305X4MM


### 3.Feature:

- A).Natural, random appearance creates an elegant, natural look B).Reduces noise
- C).Comfortable under foot and on your knees
- D).High resiliency
- E).Insulates against heat and cold
- F).Low thermal conductivity
- G).Highly resistance to moisture and liquid penetration
- H).Ability to absorb vibration
- I).Cork floors are hypoallergenic

**WWW.HERRSIAN.COM**

**Beautiful, Natural, Earth Friendly, Decorating Materials!**

## Cork Floor Coverings Installation:

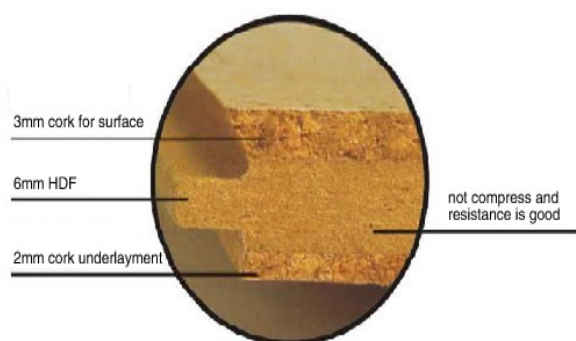

### 1 - Installation guide:

Before you start, you need the following:

- a sharp utility knife
- tape measure or ruler
- pencil
- good hand roller
- clean plastic tray
- rubber hammer
- some cotton rope

### 2- Sub-floor preparation

The cork tiles can be installed directly over concrete or plywood subfloors. In both cases the subfloor must be smooth and free of bumps and holes. If the concrete subfloor is uneven, the plyboard should be applied. The subfloor, no matter concrete or wood, should be clean and dry.

### 3- Requirement for urethane

The water-based urethane should be used and applied within warranted period.

### 4- Other requirements:

Remove tiles from packages and spread out in the room prior to install at least 7 days in advance in order to avoid variation of size and shade.

The rugs should not be laid within 10 days and keep the room ventilated.

### 5- Steps:

A. make the center of the room and mark lines with pencil. Spread the adhesive and install the first four tiles from four direction on the center point .

B. Apply the adhesive on the sub floor or back of tiles. Considering the room temperature, overlaid the tiles in sequence when drying properly. Then knock the edges to make sure that they are pressed firmly into the adhesive.


Attention: no bubbles existing on the surface of tiles prior to fixing.

### 6- Maintenance:

A. clean regularly with dry and damp mop. And sweep the bulk of dirt in time.

B. avoid the puncture by sharp things.

C. avoid dropping the still burning cigarette end on tiles

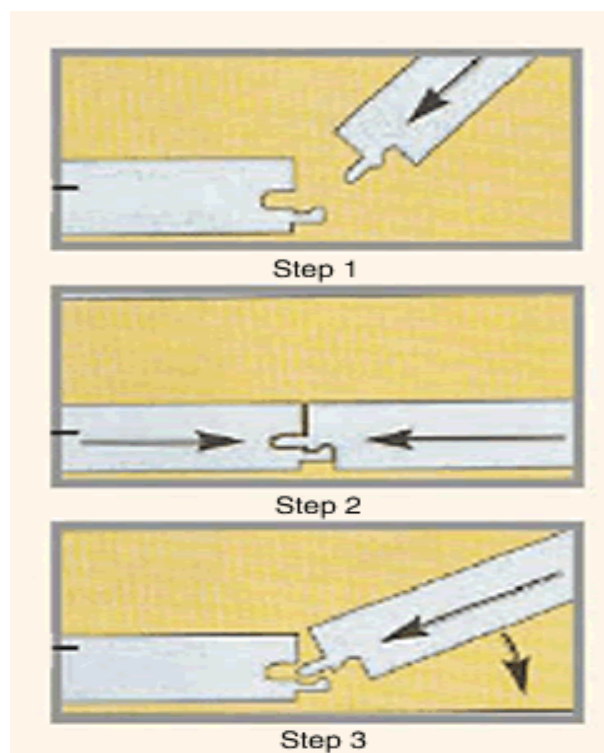

---

D. places walked frequently may be wore in more or less 5 years. Use sand paper to rub it slightly in order to clear away the dust. Then brush the specialized lacquer for 3 times about every 10 hours.

**WWW.HERRSIAN.COM**

**Beautiful, Natural, Earth Friendly, Decorating Materials!**

**Import & Export Agent: Xian Tiderip Int'l Trade Limited Company**

**SIAN HERRSCORK INC.**

**ADD:** Room 428, 4/F Tong Rui Building, 239 Chang An Road (Mid) Xian ,China

**FAX:** 0086-29-8840 4061

**E-MAIL:** louisvon@163.com

stanley\_sung@163.com

**P.C :** 710061